
Technical Specifications

HP P22h G4 21.5-inch Monitor

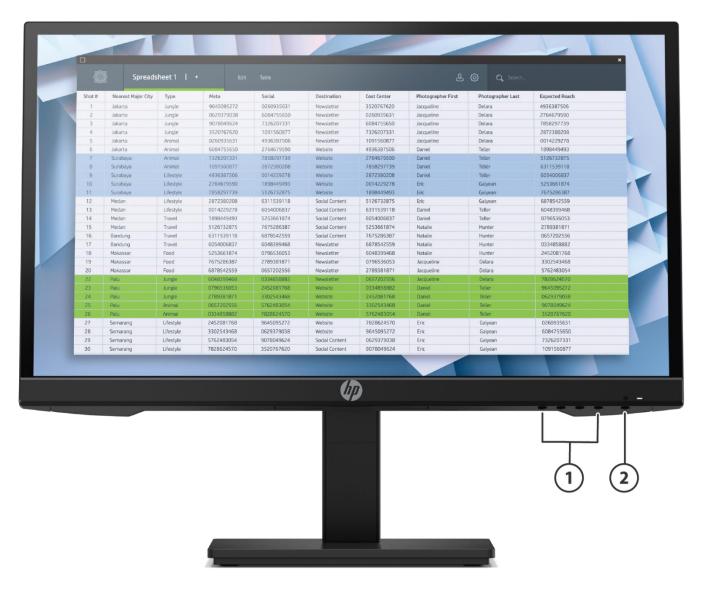

Front

Function Buttons

2. Power Button

Technical Specifications

HP P22h G4 21.5-inch Monitor



- 1. Power Connector
- 2. DisplayPort™ Connector
- 3. HDMI Port

Back

- 4. VGA Port
- 5. Security Cable Slot

Technical Specifications

Models: 7UZ37AA

Panel SpecificationsDisplay Size (Diagonal)21.5-inDisplay Panel TypeIPS

Micro-Edge Bezel Yes, 3-sided

Curved Panel N/A

Native Resolution/Timing 1920×1080 @ 60 Hz

Native Resolution Note* 1 VGA, 1 HDMI 1.4, 1 DisplayPort 1.2

Panel Bit Depth6bit + AFRCAspect Ratio16:9Brightness - Typical250 cd/m²Static Contrast Ratio - Typical1000:1Static Contrast Ratio - Minimum700:1Dynamic Contrast Ratio (DCR)8,000,000:1

Flicker Free Yes

Pixel Pitch 0.24795(H)mm x 0.24795(V)mm

Pixels Per Inch (PPI) 102

Backlight Lamp Life (to half brightness 30k minimum

- in hours)

Anti-Glare Panel Yes

Response Time - Typical 5ms (gray to gray)

Horizontal Viewing Angle (typical 178°

CR>10)

Vertical Viewing Angle (typical CR>10) 178°

 Panel Active Area (w x h)
 476.06mm x 267.79mm

 Preset Graphic Modes/Supported
 640 x 480 @ 60 Hz

 Resolutions
 720 x 400 @ 70 Hz

 800 x 600 @ 60 Hz

1024 x 768 @ 60 Hz 1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz

 Maximum Resolution
 1920 x 1080 @ 60 Hz

 Recommended Resolution
 1920 x 1080 @ 60 Hz

Vertical Scan Range48Hz - 75HzHorizontal Scan Range30KHz - 86KHzDefault Color TemperatureNeutral (6500K)Maximum Pixel Clock Speed180MHz

*VGA or DisplayPort™ 1.2 or HDMI 1.4 required to drive panel at its native resolution

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage NTSC 72%

Color Management Factory Color Calibrated Yes

Factory Color Presets Warm - 5000K

Neutral - 6500K



Technical Specifications

Cool - 9300K Color Space / Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2 **Default Color Temperature** Neutral (6500K)

Low Blue Light Modes Yes **RGB Channel Adjust** Yes, Gain

Monitor Specifications Exterior Color of Monitor Bezel and Black

Stand

Plug & Play Yes

Tilt -5° to +23° 360° **Swivel Pivot** Clockwise 90° **Height Adjustment Range** 100 mm **VESA Mounting** Yes

Security Lock Ready Yes **Detachable Base** Yes

Warranty Based on region

On Screen Display (OSD)

On Screen Display User Controls Brightness+, Color, Image, Input, Power, Menu,

Management, Information, Exit

User Programmable Modes Yes. 20

Monitor Control Buttons or Switches Menu/OK, Minus ("-")/Brightness, Plus ("+")/Color,

Back/Input, Power

User-Assignable Function Buttons Yes. 3 (5 options)

Languages 10 (English, Spanish, German, French, Italian, Netherlands,

Portuguese, Japanese, T-Chinese and S-Chinese)

Connector Types DisplayPort™ 1, DisplayPort™ 1.2

> HDMI 1, HDMI1.4

VGA

HDCP support Yes, (DisplayPort™ and HDMI)

Power & Operating

Power Supply Internal **Specs**

Power Source 100 - 240 VAC 50/60 Hz

Power Consumption - Maximum 21 W **Energy Saving** 0.3 W Power Consumption - Typical 19 W

Power cable length 1.9 m

Operational Mode at 100 VAC 12.5 W **Energy Star Data** Operational Mode at 115 VAC 12.5 W

Operational Mode at 230 VAC 12.5 W

EU Energy Efficiency Class (EC1062)

Operating Conditions

On-mode Power Consumption 53.08 W >13.24 W

(EC 1062/2010)

Annual Power Consumption 18.3 kWh >19.3 kWh

(EC 1062/2010)

Energy Efficiency Class (EC 1062/2010) A > A+

Operating Temperature - Celsius

Operating Temperature - Fahrenheit 41°C -95°F Non-operating Temperature - Celsius -20° - 60°C Non-operating Temperature -29° - 140°F

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

5°-35°C

Non-operating Humidity 5 - 95%

Technical Specifications

 Operating Altitude
 0 - 5,000 m (16,400 ft.)

 Non-operating Altitude
 0 - 12,192 m (40,000 ft.)

Environmental Features and Certifications Mercury-free LED display backlighting

Arsenic-Free Display Glass

Low Halogen**

Yes, Mercury-free LED backlighting

Yes Yes

GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR,

PVC)

NOTE: External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained

after purchase may not be Low Halogen.

Agency Approvals and Certifications CE,CB,KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/

EAC/UL/CSA/PSB/ISC/CCC/CEL/Energy

Star/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New

Imperial

Zealand MEPS/WEEE

Microsoft WHQL CertificationWin 10, Win 8, Win 7ENERGY STAR®Yes, ENERGY STAR® 8

EPEAT® 2019 Registered* Yes, Sliver
China Energy Label CEL Grade 1
TCO Certified Yes

SmartWay Transport Partnership - NA Yes (NA SKU)

only

Note: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

Metric

Unit Product/Package
Specifications

Pallet Information

	<u></u>	·····p Ciriat
Product Dimensions (Unpacked with stand) (W x D x H)	49.73 x 21.16 x 45.49 cm	19.59 x 8.33 x 17.91 in
Product Dimensions (Packed) (W x D x H)	56.7 x 18.9 x 38.5 cm	22.32 x 7.44 x 15.16 in
Display Head Dimensions (Unpacked without stand) (W x D x H)	49.73 x 4.59 x 30.11 cm	19.59 x 1.81 x 11.85 in
Base Area Footprint (w x d mm)	214.6 x 211.6 mm	8.45 x 8.33 in
Bezel Measurements	Bottom 21.8 mm	Bottom 0.86 in
Product Weight (Unpacked with stand)	4.14 kg	9.13 lb
Product Weight (Packed)	5.65 kg	12.46 lb
Product Weight (Head Only)	2.06 kg	4.54 lb
Pallet Dimensions (L x W x H)	1150 x 1150 x 126 mm	45.28 x 45.28 x 4.96 in
Pallet Total Weight (L x W x H)	355.55 Kg	782.92 lbs
Pallet Layers	5	
Pallet Product per Layer	12	

60

Total Products per Pallet

^{*} Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit http://www.epeat.net for more information.

^{**}External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

Technical Specifications

Container Load, 20-Foot600 unitsContainer Load, 40-Foot1,200 unitsContainer Load, 40-Foot HighQ1,440 units

Software Included

HP Display Assistant

What's in the box?

AMS: AC Power Cord (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft, DP Cable (1.8m) 5.9 ft LA: AC Power Cord (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft, DP Cable (1.8m) 5.9 ft

APJ (exclude Japan): AC Power Cord (1.8m) 5.9 ft, VGA Cable (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft APJ Japan: AC Power Cord (1.8m) 5.9 ft, VGA Cable (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft, DP Cable

(1.8m) 5.9 ft

EMEA: AC Power Cord (1.8m) 5.9 ft, VGA Cable (1.8m) 5.9 ft, HDMI Cable (1.8m) 5.9 ft

User Guide and Warranty Languages **User Guide Languages**

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.

Warranty Languages

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the

Turkish.

Environmental Data	Eco-Label Certifications & declarations	 approvals and may be lab IT ECO declaratio US ENERGY STAR TCO 8.0 EPEAT® Silver registration s 	••	se marks: See http://www.epeat.net
	Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
	Normal Operation	11.41 W	11.42 W	11.44 W
	Sleep	0.17 W	0.18 W	0.17 W
	Off	0.11 W	0.12 W	0.11 W
	Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
	Normal Operation	39 BTU/hr	39 BTU/hr	39 BTU/hr
	Sleep	1 BTU/hr	1 BTU/hr	1 BTU/hr
	Off	0 BTU/hr	0 BTU/hr	0 BTU/hr

service level is attained for one hour.

Technical Specifications

Additional Information	Subset of the state of the stat	product is in compliance with the Restrictions of Hazstances (RoHS) directive - 2002/95/EC. HP product is designed to comply with the Waste Electronic Equipment (WEEE) Directive - 2002/96/EC. product is in compliance with California Proposition fornia; Safe Drinking Water and Toxic Enforcement A product is in compliance with the IEEE 1680 (EPEAT) or level, see http://www.epeat.net tics parts weighing over 25 grams used in the productics parts weighing over 25 grams used in the productics parts weighing over 25 grams used in the production of 11469 and ISO1043. product contains 55% post-consumer recycled plassording to IEEE 1680.1-2018 standard, criterion 4.2.1. product is 96.4% recycle-able when properly dispose	ectrical and 65 (State of ct of 1986). standard at the ct are marked tic (by wt.) 1.
Packaging Materials	External:	PAPER/Corrugated	673 g
	Internal:	PLASTIC/EPS (Expanded Polystyrene)	342g
		PLASTIC/Polyethylene Expanded - EPE	32 g
		PLASTIC/Polyethylene high density - HDPE	8 g
RoHS Compliance	HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. We met our voluntary objective to achieve worldwide compliance with the new EU		
	continue to e substances a	ements for virtually all relevant products by July 201 extend the scope of the commitment to include furth is regulations continue to evolve. Opy of the HP RoHS Compliance Statement, see HP F	er restricted

Technical Specifications

Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):		
	 Asbestos Certain Azo Colorants Certain Brominated Flame Retardants – may not be used as flame retardants in plastics Cadmium Chlorinated Hydrocarbons Chlorinated Paraffins Bis(2-Ethylhexyl) phthalate (DEHP) Benzyl butyl phthalate (BBP) Dibutyl phthalate (DBP) Diisobutyl phthalate (DIBP) Formaldehyde Halogenated Diphenyl Methanes Lead carbonates and sulfates Lead and Lead compounds Mercuric Oxide Batteries Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. Ozone Depleting Substances Polybrominated Biphenyls (PBBs) Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB) Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. Radioactive Substances Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) 		
Packaging	 HP follows these guidelines to decrease the environmental impact of product packaging: Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards. 		

Technical Specifications

End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.
HP, Inc. Corporate Environmental Information	For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesi gn/ecolabels.html ISO 14001 certificates: http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755 842 and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf



Technical Specifications

Copyright © 2020 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log			
November 5, 2019	V1 to V2	Added	Environmental tab
December 13, 2019	V2 to V3	Added	HDMI Cable
February 25, 2020	V3 to V4	Updated	What's in the box Section

